
Korniche Flat Glass™ **surveying guide**

Upstand position cross section

- When specifying the dimensions of your Flat Glass, you should provide the external dimensions of your upstand and the fitted waterproof membrane
- 3 to 5^0 degree pitch
- Upstand width 75 - 85mm
- Upstand min 150mm

To ensure the upstand is square a & b should be equal with a tolerance of +/-4

*Maximum area is limited to $3m^2$

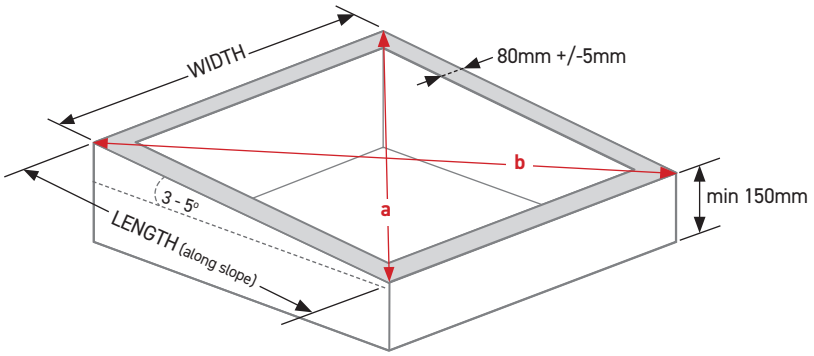

Recommended upstand detail (not supplied)

- **A:** Trim (supplied)
- **B:** Plasterboard
- **C:** Indicative structure (by others)
- **D:** Waterproof membrane

