
NEW Korniche Roof Lantern

surveying guide

Upstand position cross section

- When specifying the dimensions of your lantern you should provide the external dimensions of your upstand including the waterproof membrane. No need to add any additional overhang.
- Your upstand should have a minimum finished thickness of 65mm (width of the eaves beam).
  Recommended 75mm.
- It is the responsibility of the installer to determine the finishing detail inside. i.e. where plaster edge finishes.
- Save even more time and hassle with one of our thermally certified SIPS upstands supplied to perfectly fit your lantern.
  These can be specified with your lantern if you order through KwikQuote.
- 0^0 degree pitch on Upstand
- 25^0 degree pitch fixed pitch on product
- 28mm glass
- To ensure the upstand is square a & b should be equal with a tolerance of +/-4
- **A:** Plasterboard
- **B:** Indicative structure (by others)
- **C:** Waterproof membrane

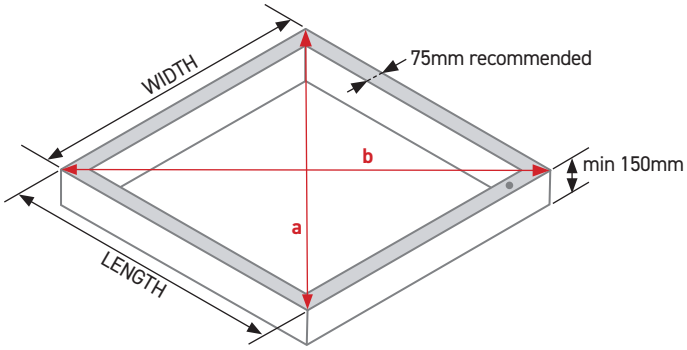

Recommended upstand detail.

